

# FORTRESS 1



## SPECIFICATIONS

The Fortress 1 maintains efficient AC Emergency Power to operate all emergency lighting fixtures at "full-light" output, providing superior dependability and security to commercial/industrial environments in an outdoor environment.

## POWER RATING

- 0.075 KW - 21 KW (or 75 Watts - 21,000 Watts) single phase output unit uses the latest DSP/PWM technology to provide the most advanced performance and reliability features

## INPUT

- 120V, 208V, 240V, 277V or 480V input 60Hz

## OUTPUT

- 120V, 240V, 277V, 480V, 120/240 or 120/277VAC  
True "on-line" design is  $\geq 92\%$  efficient at 100% linear load

## BATTERIES


- Sealed, maintenance-free, lead calcium (AGM) batteries
- 10-Year prorated warranty
- DSP/PWM Smart Battery Monitoring System is **TEMPERATURE COMPENSATED** maintaining maximum runtime and battery life
- Microprocessor controlled recharge and DSP/PWM overcharge protection standard

## LAMPS AND LOADS

- Emergency power provides **FULL LIGHT OUTPUT** from all lamps and fixtures for the entire runtime
- Operates fluorescent, compact fluorescent, incandescent, quartz, H.I.D., LED and other lamp types
- Standard or electronic ballasts, dimming devices or panels, sensors and most control equipment
- Standard or LED Exits and other safety equipment

## CODES

- UL 924, UL 1778, meets NFPA 101, NFPA 70, NEC and OSHA standards
- Cities of Chicago and New York approved
- Complies with the Buy American Act

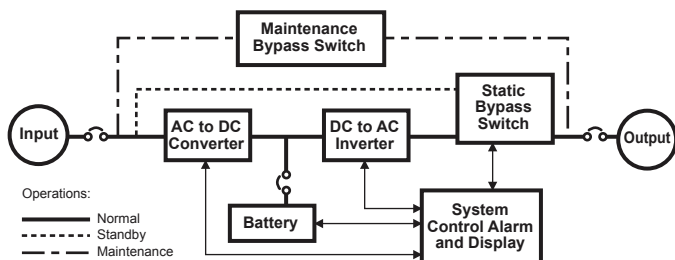

0.075 KW - 21 KW

Single Phase

Uninterrupted  
Emergency  
Lighting and  
Power  
Systems



## PROTECTION

- Provides overload, surge and undercurrent protection using DSP/PWM technology and Emergensee *Watchdog Software* to protect system performance and reliability
- Surge protection against load surges as defined in
- ANSI/IEEE C62.45 category A and B

## DIAGNOSTICS AND MAINTENANCE

- DSP/PWM technology and Emergensee *Watchdog Software* provides complete self diagnostic capabilities and LED Monitoring
- Informative advanced Display and Alarms keep you in control of your emergency lighting environment 24/7
- Automatically performs periodic self-tests ensuring a safely lighted environment *prior* to an emergency
- Single point of testing instead of multiple testing points with battery packs

## NEMA 3R CABINET

- Modular design enables flexible installation
- Forced air cooling for maximum reliability
- Systems up to 12 KW are self contained; larger systems require external battery cabinet(s)

## INSTALLATION

- Modular design and small footprint allow easy installation in an outdoor environment
- Phone assisted factory start-up standard for all systems
- Extended warranty available

## SPECIAL APPLICATIONS

- Emergensee offers numerous UL924 optional devices to meet unusual or difficult application parameters
- ECM - Environmental Circuit Module allows fixtures and lamps on the emergency circuit(s) to be operated by normal switching and/ or dimming devices in NON-emergency conditions Dimming Panel Interface allows use with emergency lights controlled by common dimmer panel

## WARRANTY

- 1-Year full warranty on system electronics
- Battery warranty 1-year with 9-years pro-rated
- System 1-year on-site warranty labor with Emergensee phone assisted start-up
- 5-Year powertrain warranty
- Maintenance contracts available



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

Fortress Outdoor 1	Power Rating	UPS			Battery			Weight (combined)	British Thermal Unit	Battery Type	Voltage (VAC)		Output Protection	Safety Approvals
		Cabinet Dimensions			Cabinet Dimensions						Input	Output		
FT1 (Consult factory for others)	KVA/KW	W	H	D	W	H	D	(lbs)	BTU's	Sealed, Maintenance free (AGM) lead calcium	<i>Select</i>	<i>Select</i>	Input and output circuit breakers standard	UL924 UL1778 NFPA 101 NFPA 70 NEC
	0.075	20"	24"	8"	not required			100	20.4					
	0.1	20"	24"	8"	not required			110	27.2					
	0.125	20"	24"	8"	not required			120	34					
	0.2	20"	24"	8"	not required			130	54.4					
	0.3	20"	24"	8"	not required			140	81.6					
	0.35	20"	24"	8"	not required			150	95.2					
	0.525	45"	51"	35.5"	not required			630	142.8					
	0.7	45"	51"	35.5"	not required			640	190.4					
	0.875	45"	51"	35.5"	not required			670	238					
	1.05	45"	51"	35.5"	not required			710	285.6					
	1.4	45"	51"	35.5"	not required			790	380.8					
	2.0	45"	51"	35.5"	not required			870	544					
	2.4	45"	51"	35.5"	not required			920	652.8					
	2.6	45"	51"	35.5"	not required			930	707.2					
	3.0	45"	51"	35.5"	not required			980	816					
	3.4	45"	51"	35.5"	not required			1030	924.8					
	3.8	45"	51"	35.5"	not required			1090	1033.6					
	4.2	45"	51"	35.5"	not required			1150	1142.4					
	4.7	45"	51"	35.5"	not required			1630	1278.4					
	5.25	45"	51"	35.5"	not required			1630	1428					
7.0	41"	72"	32"	not required			1880	1904						
8.0	41"	72"	32"	not required			1880	2176						
10.0	41"	72"	32"	not required			2250	2720						
12.0	41"	72"	32"	not required			2640	3264						
14.0	41"	72"	32"	41"	72"	32"	2945	3808						
18.0	41"	72"	32"	41"	72"	32"	4145	4896						
21.0	41"	72"	32"	41"	72"	32"	4555	5712						

## ORDERING INFORMATION

Choose the bold face catalog nomenclature that best suites your needs.

Write them on the appropriate line. Order accessories as separate catalog number.

Example:

**FT1 - 8.0 - 120/277 - ECM277/3 OCB/277/3/20/1 - 120**

Description of example:

(8.0 KW, 120 Voltage In, 277 Voltage Out, 3 277V Environmental Control Modules, 3 Output 277 Voltage Circuit Breakers at 20amps, 2 pole, 120 minute run time)

FT1		POWER RATING		VOLTAGE <sup>1</sup>		OPTIONS		TIME <sup>3</sup>
FAMILY	KW	Input/Output	Input/Output	ECM120 - 120V Environmental control module <sup>2</sup> /qty	ECM277 - 277V Environmental control module <sup>2</sup> /qty	NOF - Normally OFF output circuit/voltage / qty/pole	NOH - Normally OFF "Hold ON"/voltage/qty/pole	Minutes
	0.075	3.0	120/120	240/120-240				5
	0.1	3.4	120/208	240/120-277				10
	0.125	3.8	120/277	277/120				15
	0.2	4.2	120/480	277/277				20
	0.3	4.7	120/120-240	277/480				25
	0.35	5.25	120/120-277	277/120-240				30
	0.525	7.0	208/120	277/120-277				45
	0.7	8.0	208/208	480/120				60
	0.875	10.0	208/277	480/208				90 (Standard)
	1.05	12.0	208/480	480/277				120
	1.4	14.0	208/120-240	480/480				180
	2.0	18.0	208/120-277	480/120-240				240
	2.4	21.0	240/120	480/120-277				
	2.6		240/208					
			240/277					
			240/480					

### NOTES:

1-Consult factory for other voltage requirements.

Special voltages may effect the weight, size and number of cabinets.

2-One ECM is used per switching device or circuit.

3-Consult factory for other run times.

Specifications subject to change without notice.