



Job Name: _____

Type: _____

Part #: _____

Notes: _____

LSLEDEM-BP/DM-20

EMERGENCY DRIVER FOR LED LAMPS (WITH INTERNAL / EXTERNAL DRIVER)

STANDARD



ILLUMINATION

- Provides 180-320VDC (equals to 120-230VAC) to the load during emergency mode operation.
- For use with switched or unswitched fixtures.
- Can be used with LED lamp loads of up to 20W and provide 100% lumen output.

ELECTRICAL

- Universal 120-277V, 50-60 Hz input.
- Charge/Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Long-life, maintenance free, rechargeable NiCad battery.
- Output short/overcurrent protection: Electronic limiting, with normal operation resuming upon removal of fault.
- 90 Minute minimum emergency operating time over full temperature range.
- 24 Hour maximum battery recharge time.

HOUSING

- Durable painted steel construction in red finish.
- Provided with 2' flex conduits.

MOUNTING

- Suitable for installation on top or in remote of the fixture.
- Can be used in both switched and unswitched fixtures.


WARRANTY/LISTING

- UL Listed for factory or field installation.
- Suitable for damp locations (0°C - 50°C).
- 5 year warranty on all electronics and housing.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State codes.




LED Test switch included.

DIMENSIONS

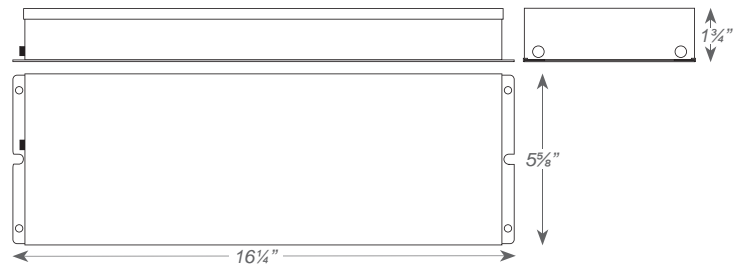

WIRING DIAGRAM

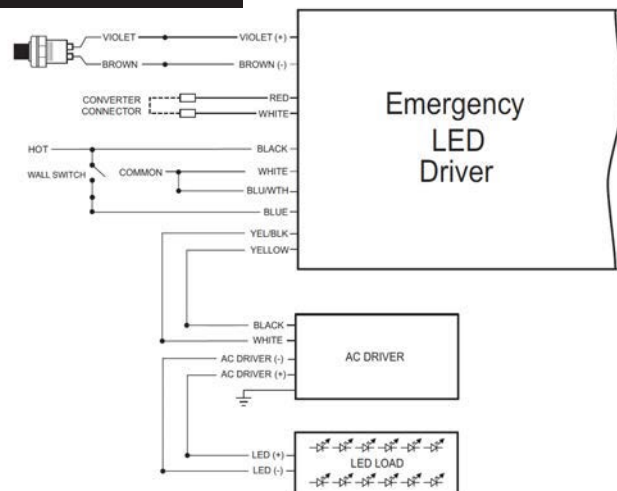

ORDERING INFORMATION

MODEL	OUTPUT RATINGS	
	VOLTAGE (VDC)	POWER (W)
LSLEDEM-BP/DM-20	180-320	20