



Job Name: _____

Type: _____

Part #: _____

Notes: _____

LSCAELXTE:

CHICAGO APPROVED LED EDGELIT EXIT SIGNS – SURFACE MOUNT



Illumination

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.
- Single or double face configurations.

Electrical

- Dual 120V/277V.
- Charge rate/power “ON” LED indicator light and push to test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Die-cast aluminum mounting canopy provided for universal top, end or back mount.

Housing

- Premium-grade, extruded aluminum housing.

Warranty


- Five year warranty on all electronics and housing. Batteries pro-rated for five years.

Ordering information

Listing

- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

Dimensions

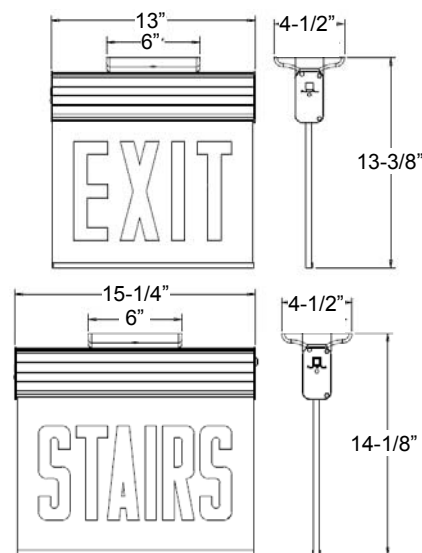

Electrical information

	Supply Voltage	Max. Watts	Max Amps
AC models	120V	4.3W	0.04A
AC models	277V	4.7W	0.02A
EM models	120V	4.5W	0.04A
EM models	277V	4.9W	0.02A

Model	Face #	Letter/Background Color		Housing Color	Battery	Signage/Directional Arrows		
		Letter	Background Color	A Aluminum	Blank AC only	NA	EXIT, no arrow	
LSCAELXTEU	1	Single			Blank	AC only	NA	EXIT, no arrow
	2	Double	RW	Red on white	W	White	EM	Ni-Cd battery
							SWNA	STAIRS, no arrow
							DA	EXIT, double arrow
							SWDA	STAIRS, double arrow
							RA ¹	EXIT, right arrow
							SWRA ¹	STAIRS, right arrow
							LA ¹	EXIT, left arrow
							SWLA ¹	STAIRS, left arrow
							LARA ²	EXIT, left/right arrow
							SWLARA ²	STAIRS, left/right arrow

Notes:

1. Available in single face configuration only.
2. Available in double face configuration only.