



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSLCTXTEU

## LOW LEVEL ALL LED EXIT & EMERGENCY THERMOPLASTIC

**COMBO**  
STANDARD



**Patent Pending**

### ILLUMINATION

- Long lasting, efficient ultra bright white LED light strip.
- 3.1 watts (24 LEDs x 0.13 watts) per light strip.
- Patent-pending high performance, smooth, chrome plated, metallized reflector with acrylic UV stabilized lens for optimal light distribution.
- Long life ultra-bright, energy efficient Red or Green LED EXIT sign illumination

### ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to Red/Green LED board and the White LED light strip for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Universal K/O pattern on back plate for wall mount.


### HOUSING

- Patented specification-grade, low profile thin plastic design is ideal for low level applications.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 regulations.

### DIMENSIONS

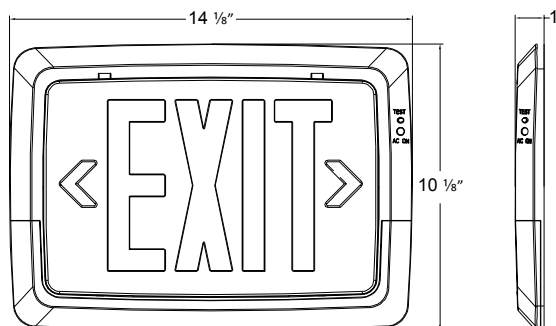

### ORDERING INFORMATION

Sample Part Number: LSLCTXTEU1RW

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR
LSLCTXTEU	1 Single Face	R Red	W White
		G Green	B Black