

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_


# LSLEDEM1

**T** **M**  
**A** **E**  
**L**

Contemporary design, full adjustability, quick installation and premium options in a stylish and economical package.



## DIMENSIONS

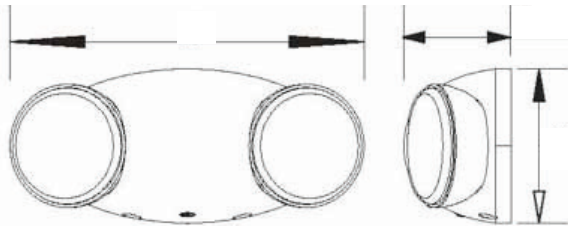

## FEATURES

- LED expected life is more than 10 years
- Injection-molded, high impact, UV-stabilized, UL 94 V-0 Thermoplastic
- Snap-together construction speeds installation
- Universal mounting plate with quick-connect feature
- Available in standard high output and remote capable
- Fully adjustable glare-free lighting heads
- White housing is standard, with an optional black housing available
- Dual-voltage input 120V or 277V AC operation
- Emergency unit provided with test switch, status indicator and rechargeable battery
- Maintenance-free, Ni-Cad batteries provide 90 minutes of emergency power
- Damp location listed
- Five-year warranty

## ORDERING INFORMATION

Series	Housing Color	Options	Example Cat #
<b>LSLEDEM1</b>	<b>W</b> = White <b>B</b> = Black	<b>Blank</b> = Standard <b>H</b> = High Output <b>HRC</b> = High Output, Remote Capable	

**NOTE:** All products UL listed and comply with latest codes and performance standards including UL924.