



FEATURES

- Energy efficient LED technology
- Decals & template provided for chevron directional indicators
- NY approved spec-grade curved faceplate with 8" EXIT letters
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

ELECTRICAL

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- Maintenance-free, rechargeable Ni-Cad battery (EM model)
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Energy consumption of less than 3W for AC only and less than 5W for battery backup units

MOUNTING

- Drop-thru ceiling mount with hanger bars

HOUSING

- Premium-grade, extruded aluminum housing (also available in black or white powder coated)

ILLUMINATION

- Ultra-bright, energy efficient Red LED
- UV-stabilized ultra-clear acrylic edgelit panel
- NY approved 8" EXIT letters
- Double face utilizes a silver or white mylar insert


OPTIONS

- Edgelit EXIT panels available to order separately (contact customer service)

WARRANTY

- Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years

DIMENSIONS

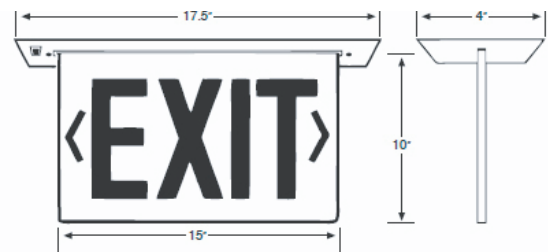

ORDERING INFORMATION

Sample Part Number: **LSNYEXREL-2-R-M-A-EM**

MODEL	FACE	LETTER COLOR	PANEL COLOR	HOUSING COLOR	BATTERY
LSNYEXREL	1 - SINGLE FACE 2 - DOUBLE FACE	R - RED	C - CLEAR M - MIRROR (SILVER MYLAR) W - WHITE (WHITE MYLAR)	W - WHITE B - BLACK A - ANODIZED ALUMINUM	B - BLANK (AC ONLY) EM - NICAD

NOTE: Product specifications subject to change without notice. Updated 08.2017