

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
LSX-RED/GREEN/EM/2C/SDT	3.8	3.8	0.034	0.020

# LSX LED EXIT SIGN



## ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.
- Compact, low-profile design.


## OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- cUL: Units tested to meet requirements of CAN/CSA-c22.2 No. 141-02 standard for unit equipment.

## LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 40°C).

## DIMENSIONS

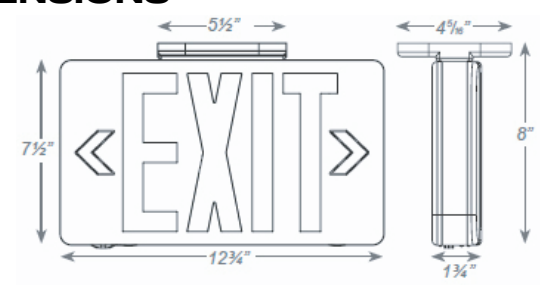

## ORDERING INFORMATION

Special voltage options available. Check with your Lighting Representative.

1 Available only with EM units.  
 2 Available only with AC units

MODEL	# OF FACES	LETTER-COLOR	HOUSING COLOR	BATTERY	OPTIONS
LSX	1 - Single Face U - Universal Single/ Double Face	R - Red G - Green	W - White B - Black	Blank - AC Only EM - Battery Backup	SDT - Self-Diagnostics <sup>1</sup> 2C - Dual circuit operation <sup>2</sup> Custom - Custom wording USA - Assembled in USA cUL - cUL Listed

## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
LSX-RED/GREEN/EM/2C/SDT	3.8	3.8	0.034	0.020