



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSXDC

## DIE-CAST ALUMINUM LED EXIT SIGN



STANDARD

OPTIONAL



### ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

### HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.


### OPTIONS

- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- cUL: Units tested to meet requirements of CAN/CSA-c22.2 No. 141-02 standard for unit equipment.

### LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery protected for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

### DIMENSIONS

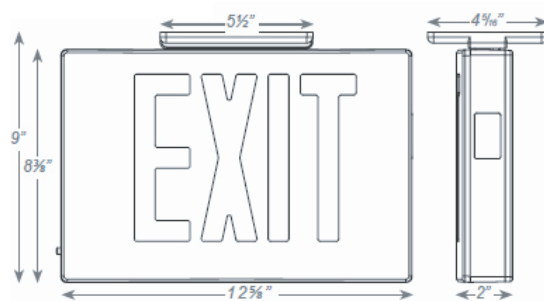

Sample Part Number: **LSXDC**

### ORDERING INFORMATION

Special voltage options available. Check with your Lighting Representative.

1 Available only with EM units.  
2 Available only with AC units

MODEL	# OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
LSXDC	1 - Single Face 2 - Double Face 3 - Universal Single/ Double Face	R - Red G - Green A - Aluminum	W - White B - Black A - Aluminum	Blank - AC Only EM - Battery Backup	SDT - Self-Diagnostics <sup>1</sup> 2C - Dual circuit operation <sup>2</sup> TP - Tamper-Proof USA - Assembled in USA