



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSXDCC

## DIE CAST ALUMINUM LED/EXIT EMERGENCY COMBO



### FEATURES

- Very first die cast combo on the market; unique new design spec-grade die cast EXIT sign with LED emergency lights in low-profile housing
- Energy efficient LED technology
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

### ILLUMINATION

- Ultra-bright, energy efficient long-lasting Red or Green LED
- Ultra bright white LED lamps in emergency lighting heads

### ELECTRICAL

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge
- Maintenance-free, rechargeable Ni-Cad battery (EM model)
- Internal solid-state transfer switch automatically connects the internal battery to LEDs and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### HOUSING

- Premium-grade, extruded aluminum housing (also available in black or white powder coated)
- Spec-grade curved faceplate
- Easily removable chevron directional indicators
- Unique design allows double face conversion in the field
- Quick-snap face plate closure



### MOUNTING

- Universal surface mount, wall or ceiling, with EZ-snap thermo-plastic mounting canopy, which snaps into place making installation quick & easy.
- Die-cast mounting canopy included (provides top, end or back mount convenience)
- Universal wall mounting K/O pattern


### OPTIONS

- Die-Cast EXIT panels available to order separately (contact customer service)

### LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery pro rated for five years.

### DIMENSIONS

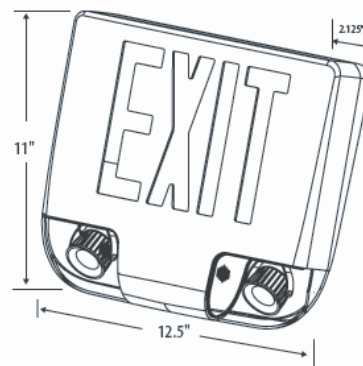

### ORDERING INFORMATION

Sample Part Number: **LSXDCC-2-R-W-W-EM**

MODEL	# OF FACES	LETTER COLOR	HOUSING COLOR	FACE COLOR	BATTERY	OPTIONS
LSXDCC	1 - Single Face 2 - Double Face 3 - Universal Single/ Double Face	R - Red G - Green	A - Brushed Aluminum B - Black Powder Coated W - White Powder Coated	A - Brushed Aluminum B - Black Powder Coated W - White Powder Coated	EM (Standard)	FP - Face Plate (order separately)

NOTE: Product specifications subject to change without notice. Updated 08.2017