



Job Name: _____

Type: _____


Part #: _____

Notes: _____

LSXLPDC THIN DIE-CAST LED EXIT SIGN



STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.


HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.

LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

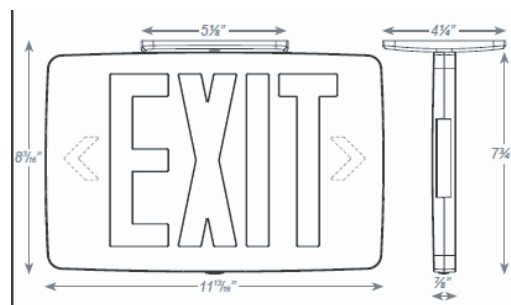

ORDERING INFORMATION

Sample Part Number: **LSXLPDC**

MODEL	# OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY
LSXLPDC	1 - Single Face 2 - Double Face	R - Red G - Green	W - White B - Black A - Aluminum	Blank - AC Only EM - Battery Backup