

Job Name: _____

Type: _____

Part #: _____

Notes: _____

LSXST

STEEL LED EXIT SIGN



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field selectable steel knockout chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

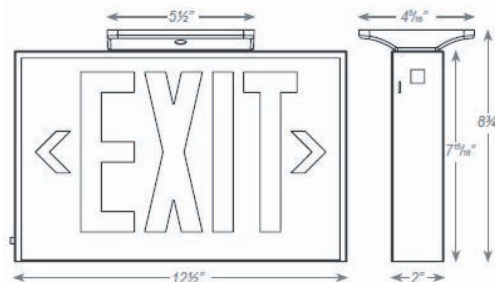

ORDERING INFORMATION

Sample Part Number: **LSXST**

Special voltage options available. Check with your Lighting Representative.

1 Available only with EM units.

MODEL
LSXST

OF FACES
1 - Single Face
2 - Universal Single/Double Face

LETTER COLOR
R - Red
G - Green

HOUSING COLOR
W - White
B - Black

BATTERY
Blank - AC Only
EM - Battery Backup

OPTIONS
SDT - Self-Diagnostics ¹

NOTE: Product specifications subject to change without notice. Updated 08.2017